

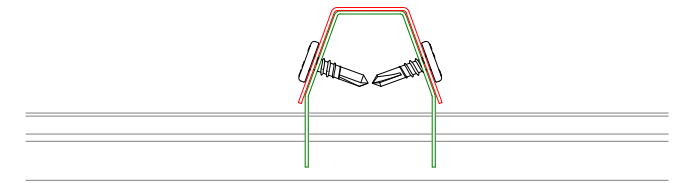
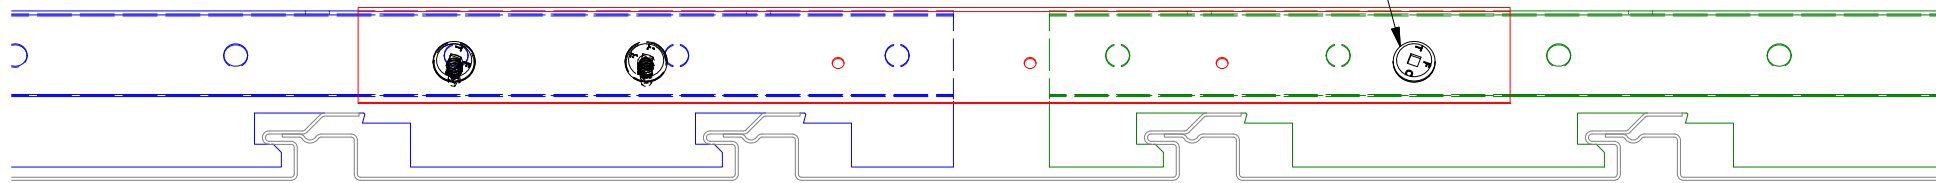



Before securing Splice on both sides, ensure Carrier to Carrier spacing is right for correct panel engagement.

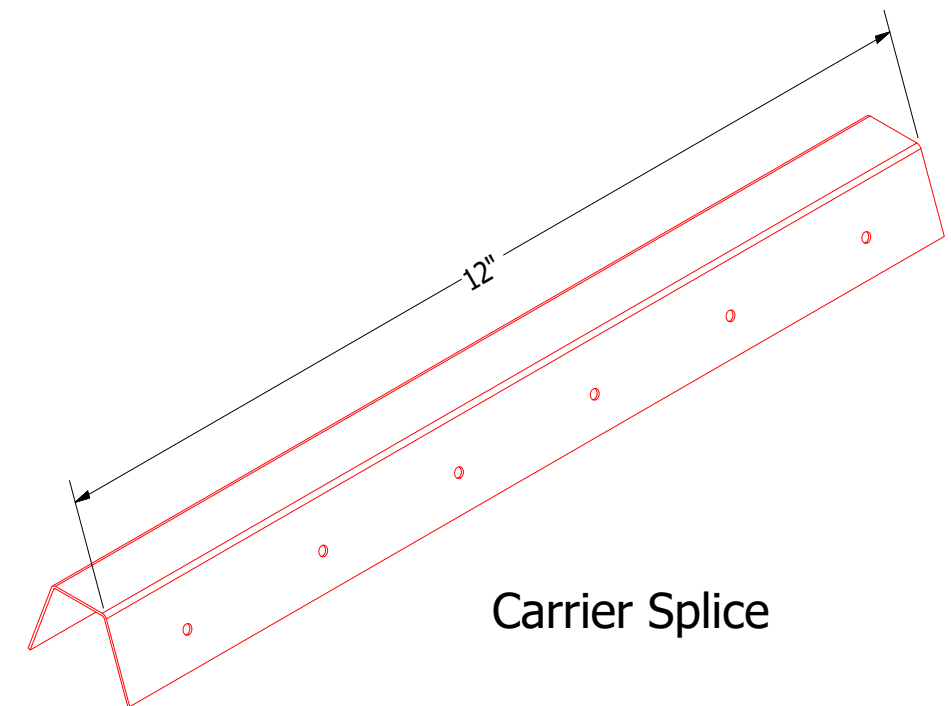

Stagger Splice Locations

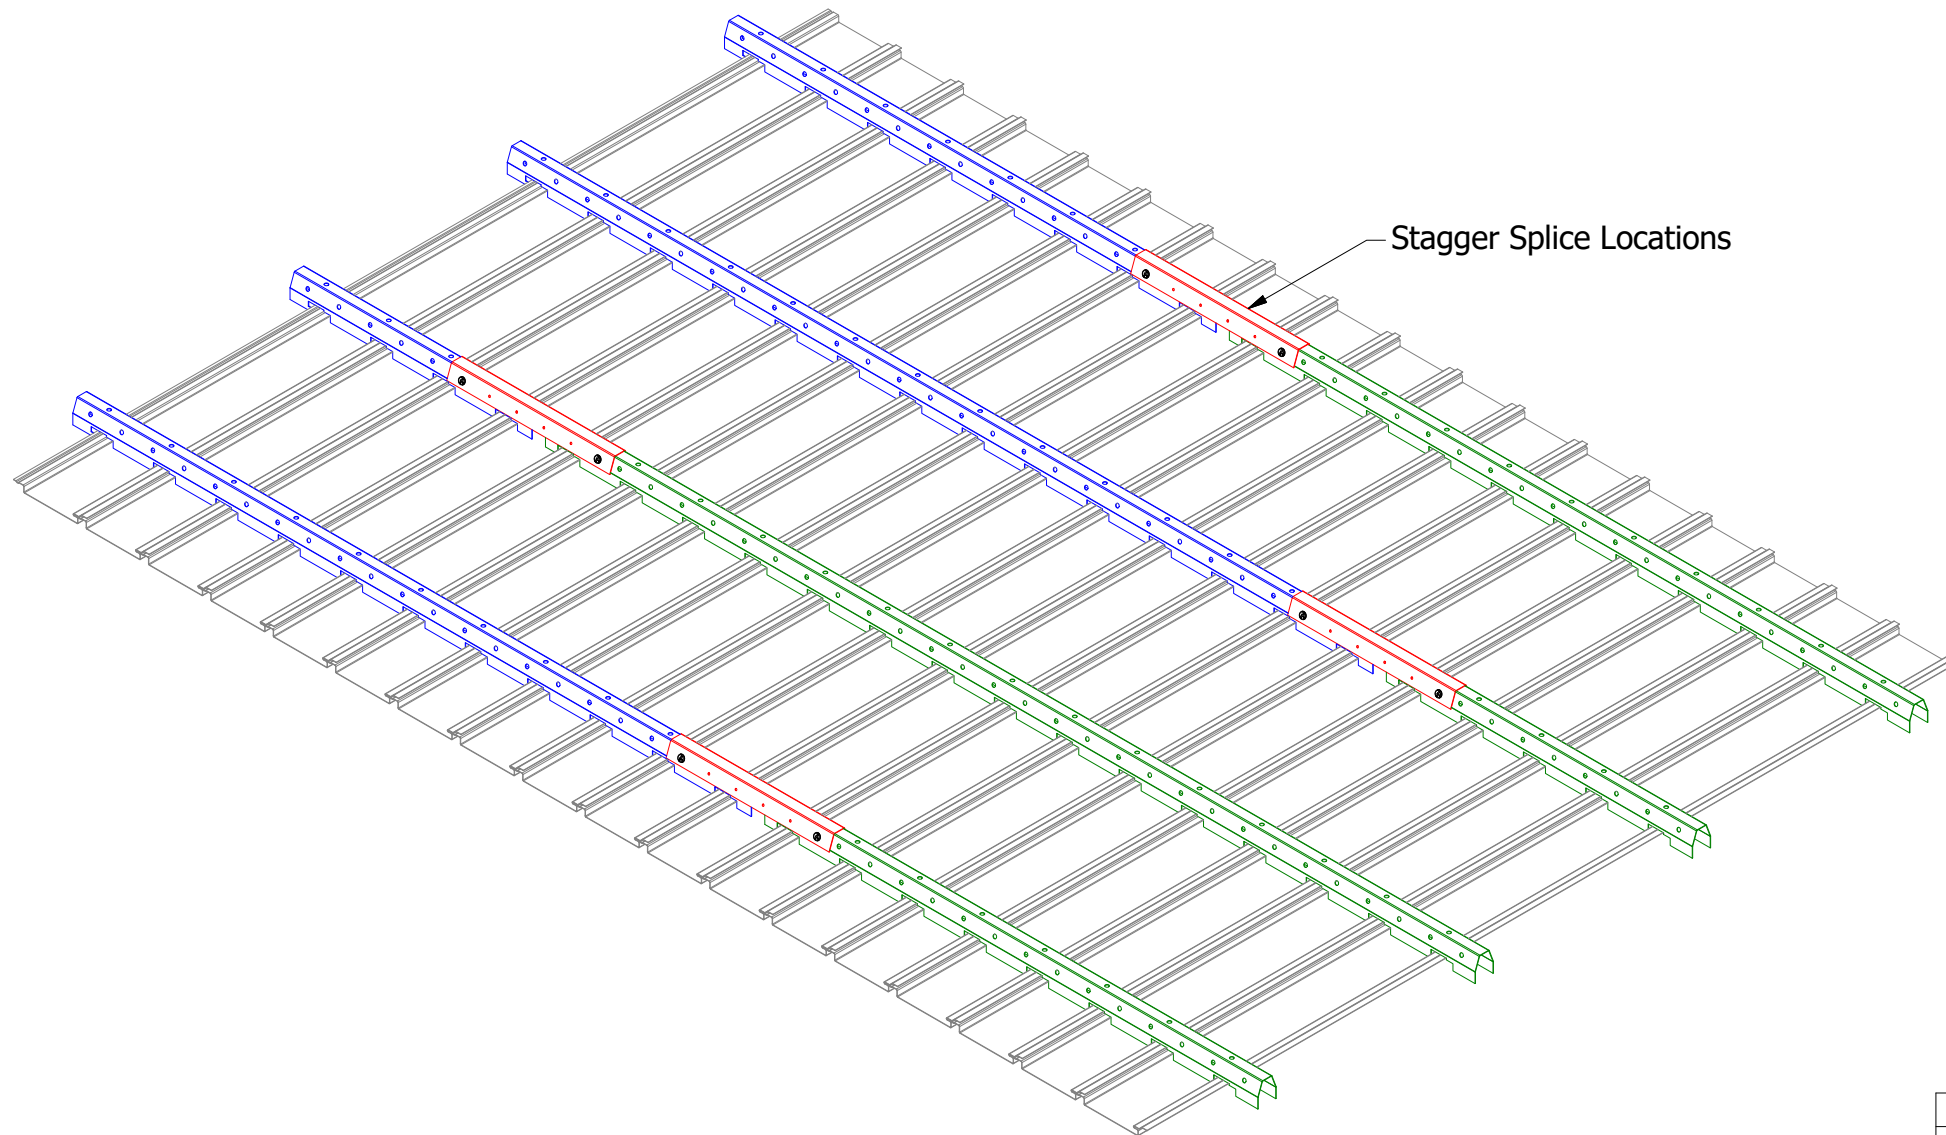

Carrier Splice



ATAS INTERNATIONAL, INC
 Allentown PA
 610-395-8445
 Mesa AZ
 480-558-7210

				TITLE Opaline Carrier Splice Option 1 Detail	
				DWG. NO.	DR KRK DATE 9/15/2023
01	3/15/2024	Updated Splice Installation Instructions	KRK	APP	DATE
REV. NO.	DATE	DESCRIPTION OF REVISION	BY	APP	SH. SIZE B SCALE X:X