


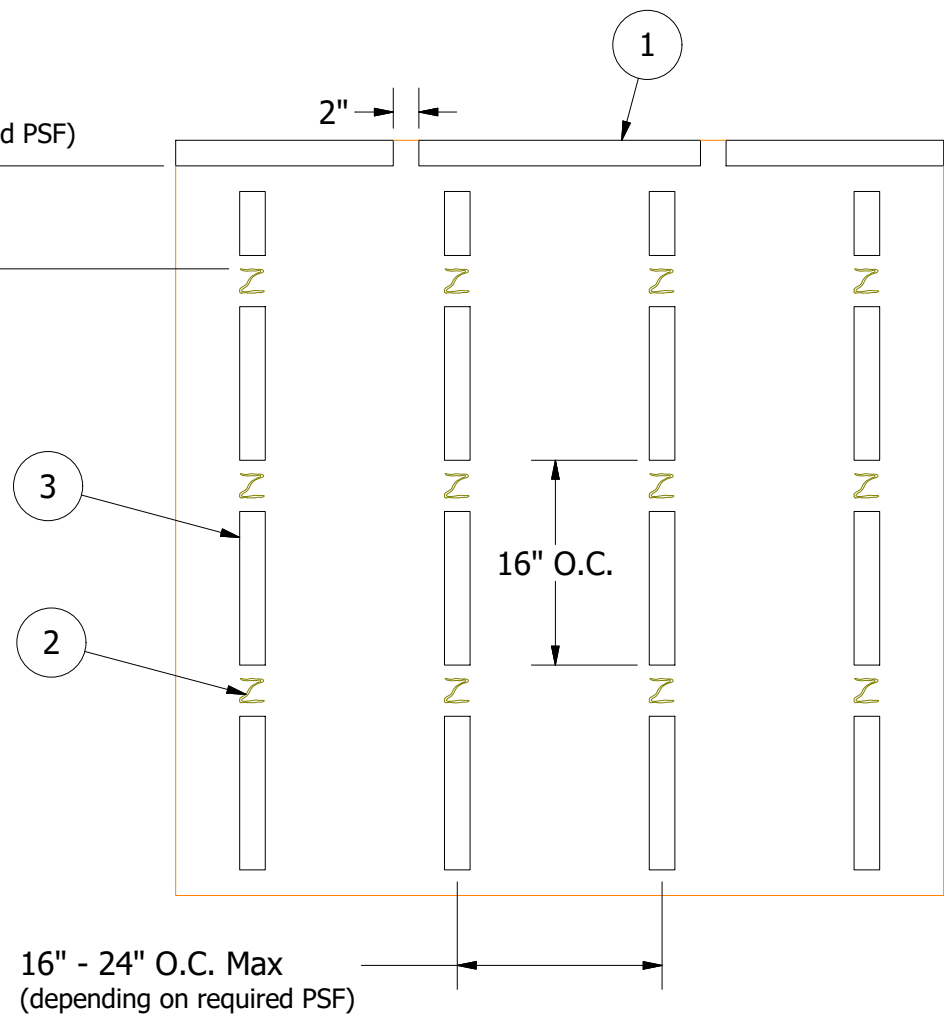


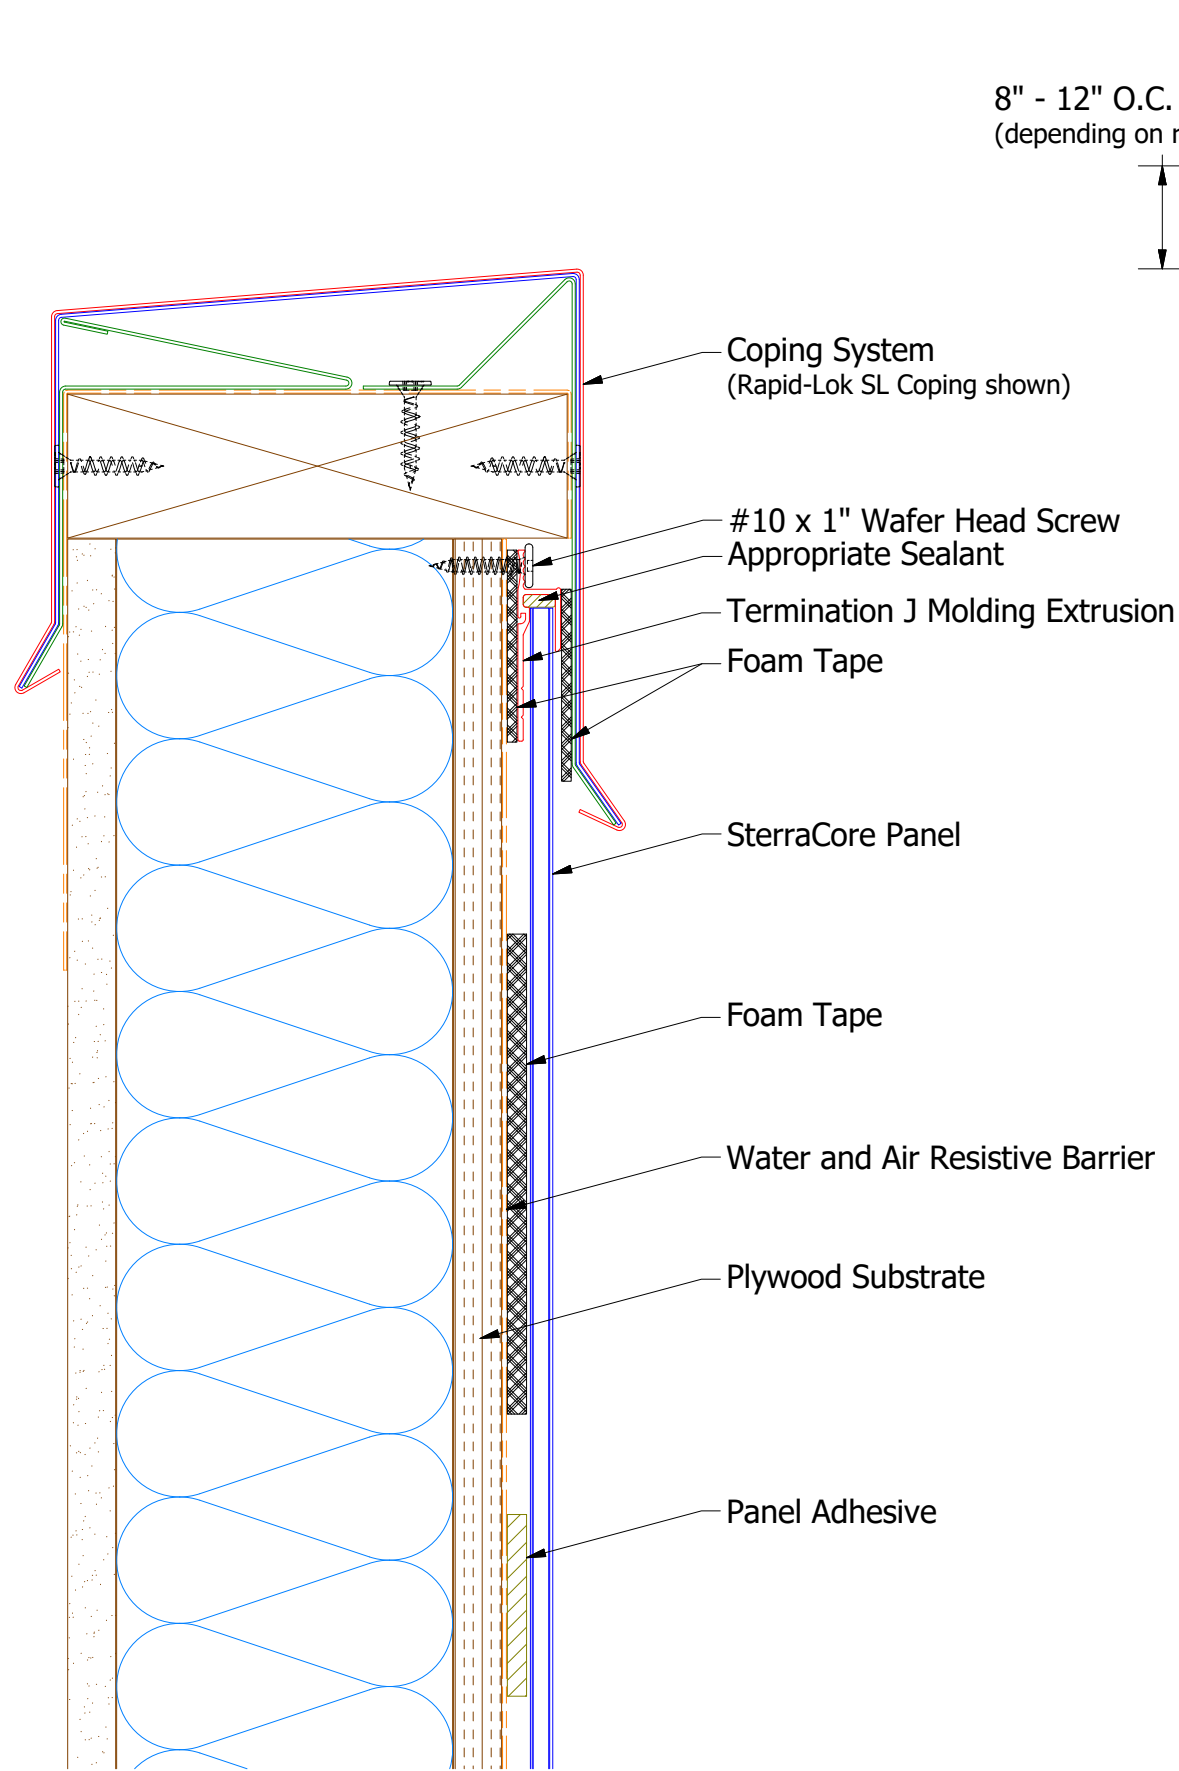

- (1) Termination J Molding Extrusion installed on Horizontal Foam Tape 2" min. gap at 24" O.C.
- (2) Panel Adhesive applied 16"-24" O.C. Horizontally and 16" O.C. Vertically.
- (3) Foam Tape installed Vertically in between Panel Adhesive.



Termination J Molding Extrusion

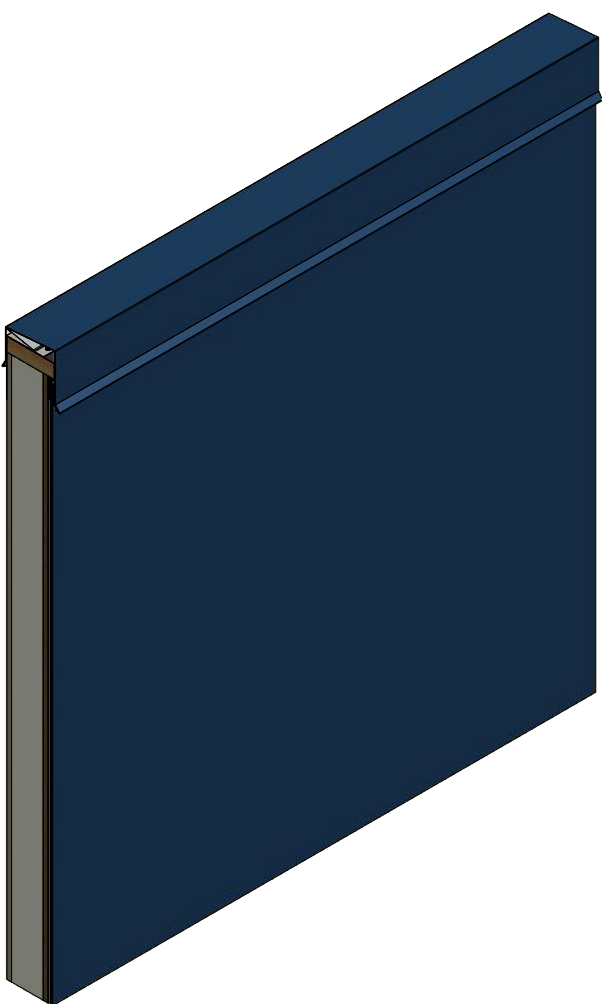

SterraCore Panel

REV. NO.	DATE	DESCRIPTION OF REVISION	BY	APP	TITLE	DWG. NO.	DR	DATE
					SterraCore Top of Wall Detail		KRK	4/12/2022
							APP	DATE
							SH. SIZE	SCALE
							B	X:X



ATAS INTERNATIONAL, INC
Allentown PA
610-395-8445
Mesa AZ
480-558-7210

TITLE		SterraCore Top of Wall Detail	
DWG. NO.	DR	KRK	DATE
	APP		DATE
SH. SIZE	B	SCALE	X:X