



# STANDING SEAM SHINGLE™

**A Modern Version of the  
Traditional Standing Seam**

# STANDING SEAM SHINGLE™





- Traditional Standing Seam panel in two standard lengths - 3' and 5'
- Produced from .032 Aluminum in 7 standard colors. (Inquire for additional color options.) For a natural finish, 16 oz. Copper is also available.
- Typical applications include mansards, entryways, commercial and residential roofing and walls
- Installed vertically from Eave to Ridge
- Four-way interlock
- Seam and lock are an intergral part of the panel – no blow-offs or creeping of the seam
- Modules fastened with an anchor clip and lock system
- Can withstand high wind, rain, snow and ice
- Fire resistant – will not burn or support combustion
- May be an insurance advantage
- Will not warp, crack, rot or peel
- Environmentally friendly – ENERGY STAR® compliant colors available. Contact ATAS for current color listings
- Tested in accordance with UL 790/ASTM E 108, UL 2218, ASTM E 84 Flame spread rating, ICBO AC 166 Penetration, UL 580 and Field Tested
- Meets all specifications for International Building Code
- Thirty Year Limited Warranty

SKU: HSS164, HSS165  
Gauges: .032 Aluminum; 16 oz. Copper  
Width: 16"  
Length: 36" or 60"  
Texture: Smooth only  
Finish: KYNAR 500® PVDF or HYLAR 5000® PVDF  
Colors: .032 Aluminum available in 7 colors  
(Mission Red, Sierra Tan, Slate Grey, Rocky Grey, Forest Green, Classic Bronze and Coppertone)  
Consult ATAS for additional color options and color chart or color clips.

Accessories: A complete line of trims are available in matching colors

Min. Pitch: 4:12

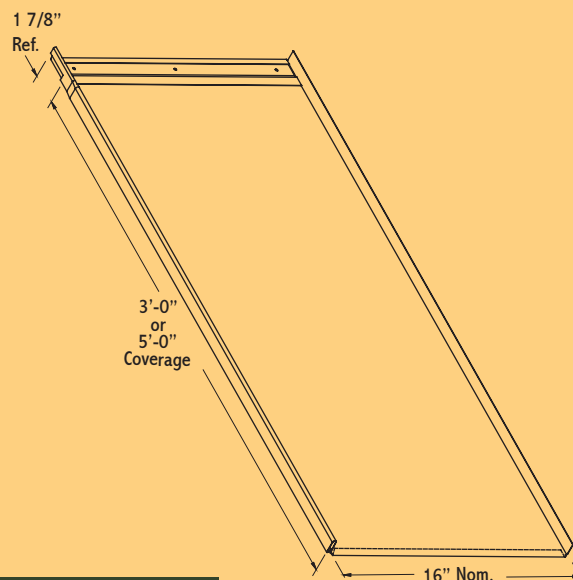

## ATAS International, Inc.

Allentown, PA · Mesa, AZ · Maryville, TN

800.468.1441 [info@atas.com](mailto:info@atas.com)

[www.atas.com](http://www.atas.com)