

NOTE: FOR USE ON SLOPES 2:12 OR LESS.

NOTE: REQUIRES FLOATING RIDGE, SHEDRIDGE, HEADWALL, AND HIP.

**Legend**

As Supplied By ATAS:


- 1 - ATAS FLS Panel
- 2 - Anchor Clips
- 4 - Painted Pop Rivets
- 5 - Eave Trim


As Supplied By Others:

- A - 30# (Minimum) Felt with Rosin Paper
- A1 - 40 MIL Ice & Water Shield
- B - Top of Roof Deck or Insulation
- C - Structurals
- D - Trim Boards
- E - #12 x 1" Wafer Head Screws
- E1 - #12 x 1-1/4" Hex Head Screws
- F - Fascia Trim ( May be fabricated/supplied by ATAS upon request).
- G - Appropriate anchor screws sufficiently long enough to fully penetrate the solid substrate (Some types/styles available from ATAS.)
- L - Plywood
- U - Butyl Tape Sealant
- WS - Wood Shim
- \* - Indicates color side.

Field Lock  
Fixed Eave Detail  
w/ Wall Panel

Scale: 3" = 1'-0"

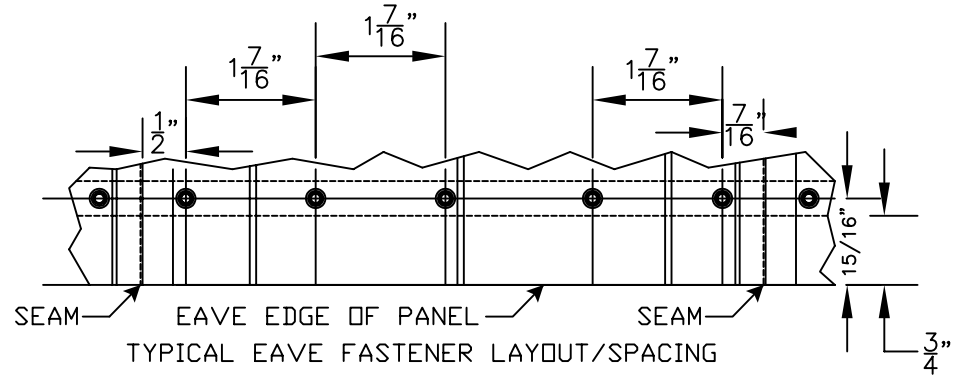

		ATAS INTERNATIONAL, INC. Allentown PA 610-395-8445 Mesa AZ 480-558-7210					
		<b>TITLE</b> <b>FLS Eave w Wall (Fixed) - ply</b>					
<b>DWG NO. / FILE NO.</b>		<b>FLS Eave w Wall (Fixed) - ply</b>				<b>SCALE</b> 3"=1'-0"	
<b>DRAWN BY</b> DAS	<b>DATE</b> 3-6-06	<b>APPR. BY</b> JEB	<b>DATE</b> 6-1-06				
<b>REVISION NO.</b> XXXX	<b>REVISION DATE</b> MM/DD/YY	<b>APPR. BY</b> XXXX	<b>DATE</b> MM/DD/YY				

Rev. No.	Revision Date	Drawn By	Description of Revision
0	6-1-06	DAS	<b>FLS Eave w Wall (Fixed) - ply</b>