

PANEL PAN PROFILES


All straight panel pans are supplied as illustrated above to be used in conjunction with the seam covers illustrated below. Note that these straight panels may be curved - see page 7.

These panel pans and the snap-on standing seam covers are available in 24 ga. galvanized steel, .032" aluminum, or .040" aluminum. The snap-on batten seam covers - PC3001 or PC3002, however, are available in 24 ga. galvanized steel, .032" aluminum, .040" aluminum, or .050" aluminum. All of these components shall have a Kynar 500® or Hylar 5000® finish in any of ATAS' standard colors. Both the pans and seam covers may be supplied in lengths ranging from 3'-0" minimum to standard truck shipping parameters. Special longer lengths, up to 70'-0", are also available upon request.


NOTE: Some panel pan widths are available in .050" aluminum - please call ATAS for availability and pricing. These panels should not be applied to roofs having a slope of less than 3/12 (depending on local climatic conditions, roof geometry and/or roof penetrations). Must be applied over a solid substrate.

Because of the panel's configuration, these panels may be tapered or curved for special architectural effects - see page 7 for restrictions.


Please feel free to call ATAS with any questions regarding this roofing product.




SNAP-ON STANDING SEAM
PCST14

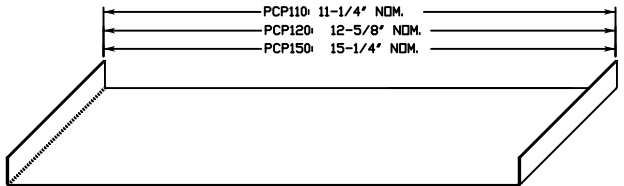

SNAP-ON 1" BATTEN SEAM
PCB001



SNAP-ON 2" BATTEN SEAM
PCB002



ATAS INTERNATIONAL, INC.
Allentown PA
610-395-8445
Mesa AZ
480-558-7210

TITLE		PC Snap-On Seam					
DWG NO. / FILE NO.		PC Snap-On Seam				SCALE	3"=1'-0"
DRAWN BY	DAS	DATE	3-6-06	APPR. BY	JEB	DATE	6-2-06
REVISION NO.	XXXX	REVISION DATE	MM/DD/YY	APPR. BY	XXXX	APPR. DATE	MM/DD/YY

Rev. No.	Revision Date	Drawn By	Description of Revision
0	6-2-06	DAS	PC Snap-On Seam