

**PANEL PAN PROFILES**


All straight panel pans are supplied as illustrated above to be used in conjunction with the seam covers illustrated below. Note that these straight panels may be curved - see page 7.

These panel pans and the snap-on standing seam covers are available in 24 ga. galvanized steel, .032" aluminum, or .040" aluminum. The snap-on batten seam covers - PC3001 or PC3002, however, are available in 24 ga. galvanized steel, .032" aluminum, .040" aluminum, or .050" aluminum. All of these components shall have a Kynar 500® or Hylar 5000® finish in any of ATAS' standard colors. Both the pans and seam covers may be supplied in lengths ranging from 3'-0" minimum to standard truck shipping parameters. Special longer lengths, up to 70'-0", are also available upon request.


NOTE: Some panel pan widths are available in .050" aluminum - please call ATAS for availability and pricing. These panels should not be applied to roofs having a slope of less than 3/12 (depending on local climatic conditions, roof geometry and/or roof penetrations). Must be applied over a solid substrate.

Because of the panel's configuration, these panels may be tapered or curved for special architectural effects - see page 7 for restrictions.


Please feel free to call ATAS with any questions regarding this roofing product.




SNAP-ON STANDING SEAM  
PCST14

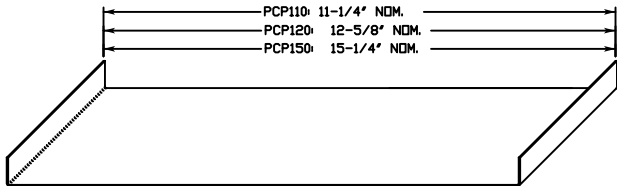

SNAP-ON 1" BATTEN SEAM  
PCB001



SNAP-ON 2" BATTEN SEAM  
PCB002



ATAS INTERNATIONAL, INC.  
Allentown PA  
610-395-8445  
Mesa AZ  
480-558-7210

TITLE		PC Snap-On Seam					
DWG NO. / FILE NO.		PC Snap-On Seam				SCALE	3"=1'-0"
DRAWN BY	DAS	DATE	3-6-06	APPR. BY	JEB	DATE	6-2-06
REVISION NO.	XXXX	REVISION DATE	MM/DD/YY	APPR. BY	XXXX	APPR. DATE	MM/DD/YY

Rev. No.	Revision Date	Drawn By	Description of Revision
0	6-2-06	DAS	PC Snap-On Seam