
GRAVEL STOP FASCIA SPECIFICATION SHEET

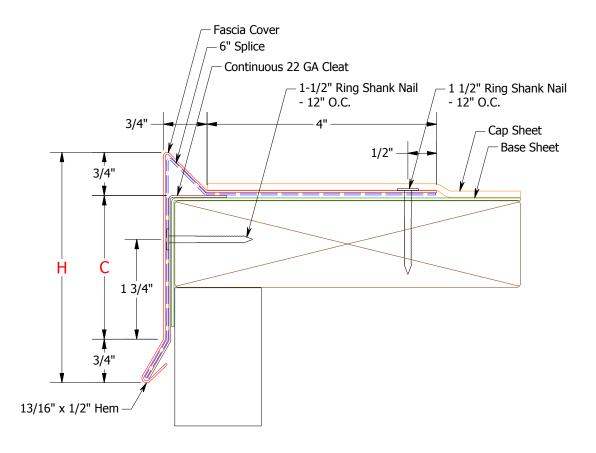

Quantity:							
Total LF (12'-0" pcs)							
Radius Fascia LF (6'-0	" pcs) (Rad	ius:, (Convex or Concave)				
Vaulted Fascia LF (6'-0" pcs) (Radius:, Convex or Concave)				-	C DIMENSION	H DIMENSION	
Standard Accessories:				-	2-1/2"	4"	
Inside Mitered Corner	(s) (Angle:)	-	4"	5-1/2"		
Outside Mitered Corner(s) (Angle:)				-	5-1/2"	7"	
				-	7"	8-1/2"	
Custom Accessories: (sketches required)				A	ANSI/SPRI ES-1 Tested		
Special Miters and Zees				_	Projects Requirement's		
*All Componets for installing Accessories are included.					Horizontal Design Pressure:psf		
MATERIAL: THICKNESS:							
☐ Pre-Finished Aluminum	□.040	□.050	□.063	Job Name:	ob Name: Customer:		
				Job #:	Representative:		
☐ Mill Finished Aluminum	□.040	□ .050	□.063	Location:	Distributor:		
☐ Pre-Finished Steel	□ 24 ga	☐ 22 ga		CUSTOMER APP	CUSTOMER APPROVAL		
☐ Stainless Steel	□ 24 ga	☐ 22 ga Authorized Signature:					
COLOR:				Approved by:	Approved by:		
				Date:	Date:		