
ATAS International, Inc. Sustainable Building Envelope Technology

RAPID-LOK COPING

SPECIFICATION SHEET

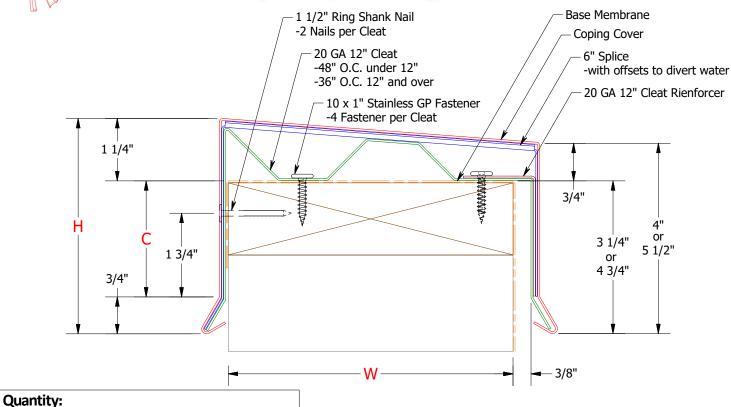

Total LF (12'-0" pcs)					
Radius Coping LF (6		or Concav	(a)		
(Radius:, Convex or Concave) Vaulted Coping LF (6'-0" pcs)					
(Radius:,		or Concav	e)		
Standard Accessories:					
Inside Mitered Corner(s) (Angle:)					
Outside Mitered Corner(s) (Angle:)					
End Closure(s) (Left,	Right)			
End Term(s) (L	.eft,	Right)			
Custom Accessories: (sketches required)					
-Inline Transition(s)	-Tee(s)				
-Transition Miter(s)	-Zee(s)				
-Ridge Miter(s)	-Specia	Miter(s))		
-Valley Miter(s)					
*All Componets for installing Accessories are included.					
MATERIAL:	THICK	NESS:			
☐ Pre-Finished Aluminum	□.040	□.050	□.063		
$\hfill \Box$ Mill Finished Aluminum	□.040	□.050	□.063		

☐ Pre-Finished Steel☐ Stainless Steel☐

COLOR:

☐ 24 ga ☐ 22 ga

☐ 24 ga ☐ 22 ga

psf

_psf

ANSI/SPRI ES-1 Tested

Projects Requirement's Horizontal Design Pressure:_

Vertical Design Pressure:_

-	C DIMENSION	H DIMENSION	W DIMENSION	
-	2-1/2"	4-1/2"	4"-12"	
-	4"	6"	4"-12"	
-	5-1/2"	7-1/2"	4"-12"	
-	2-1/2"	4-1/2"	12"-32"	
-	4"	6"	12"-32"	
-	5-1/2"	7-1/2"	12"-32"	
Job Name: Customer:				
Job #:	Representative:			
Location:	Distributor:			
CUSTOMER APPROVAL				
Authorized Signature:				
Approved by:				
Date:				