
ATAS International, Inc. Sustainable Building Envelope Technology

RAPID-LOK FASCIA



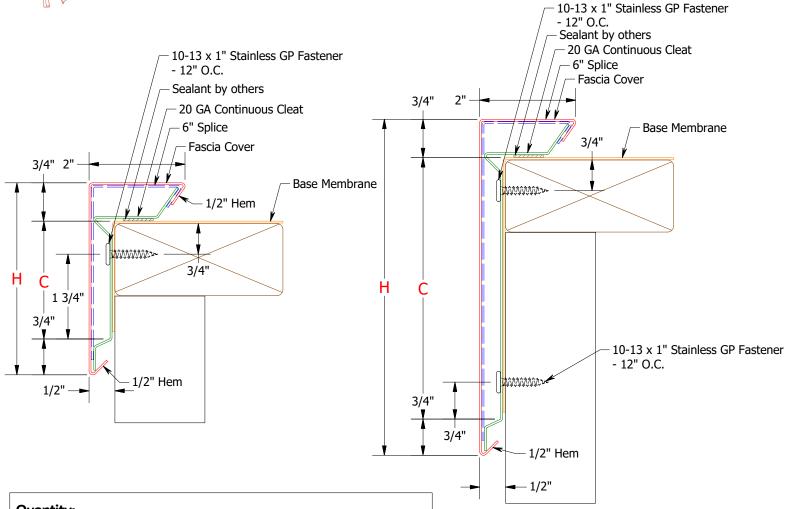

Qυ	ıar	nti	ty:
			_

Total LF (12'-0" pcs) Radius Fascia LF (6'-0" pcs) (Radius: , Convex or Concave) Vaulted Fascia LF (6'-0" pcs) (Radius: , Convex or Concave)

Standard Accessories:

Inside Mitered Corner(s) (Angle:) Outside Mitered Corner(s) (Angle:____) _End Closure(s) (____ Left, ____ Right) _End Term(s) (____ Left, ___ Right) _Sump(s) (Downspout Size: ____) _Spillout(s)

Custom Accessories: (sketches required)

Special Miters and Zees

*All Componets for installing Accessories are included.

MATERIAL:

_ Pre-Finished Aluminum	□ .0 4 0	□.050	□.063	
☐ Mill Finished Aluminum	□.040	□.050	□.063	
☐ Pre-Finished Steel	□ 24 ga	☐ 22 ga		
☐ Stainless Steel	□ 24 ga	22 ga		

COLOR:	

-	C DIMENSION	H DIMENSION
-	2-1/2" 4"	4" 5-1/2"
- - - -	5-1/2" 7" 8-1/2" 10"	7" 8-1/2" 10" 11-1/2"

ANSI/SPRI ES-1 Tested

Projects Requirement's Horizontal Design Pressure:_____psf

Job Name:	Customer:
Job #:	Representative:
Location:	Distributor:

CUSTOMER APPROVAL

Authorized Signature:

Approved by:

Date: