


LOAD TABLES
ALUMINUM
ASTM B209
3003-H16
6" COVERAGE

OPALINE PANEL OPF060

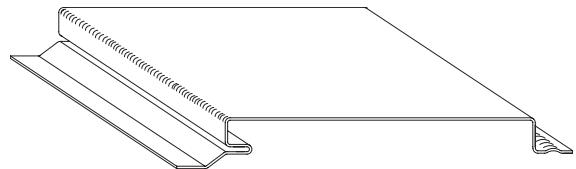

L/180 DEFLECTION CRITERIA GAUGE 0.032

SECTION PROPERTIES
NEUTRAL AXIS $Y_t = 0.056 \text{ in}$ $Y_b = 0.382 \text{ in}$
MOMENT OF INTERIA $I_x = 0.0083 \text{ in}^4/\text{ft}$
SECTION MODULUS $S_t = 0.149 \text{ in}^3/\text{ft}$ $S_b = 0.022 \text{ in}^3/\text{ft}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 11"	* 3'- 10"	* 3'- 7"	* 2'- 11"	* 3'- 10"	* 3'- 7"
15	* 2'- 6"	* 3'- 5"	* 3'- 1"	* 2'- 6"	* 3'- 5"	* 3'- 1"
20	* 2'- 3"	* 3'- 1"	* 2'- 10"	* 2'- 3"	* 3'- 1"	* 2'- 10"
25	* 2'- 1"	* 2'- 10"	* 2'- 7"	* 2'- 1"	* 2'- 10"	* 2'- 7"
30	* 2'- 0"	* 2'- 8"	* 2'- 6"	* 2'- 0"	* 2'- 8"	* 2'- 6"
35	* 1'- 11"	2'- 6"	* 2'- 4"	* 1'- 11"	2'- 6"	* 2'- 4"
40	* 1'- 10"	2'- 4"	* 2'- 3"	* 1'- 10"	2'- 4"	* 2'- 3"
45	* 1'- 9"	2'- 2"	* 2'- 2"	* 1'- 9"	2'- 2"	* 2'- 2"
50	* 1'- 8"	2'- 1"	* 2'- 1"	* 1'- 8"	2'- 1"	* 2'- 1"
55	* 1'- 7"	2'- 0"	* 2'- 0"	* 1'- 7"	2'- 0"	* 2'- 0"
60	* 1'- 7"	1'- 11"	* 1'- 7"	1'- 11"	1'- 11"	* 1'- 11"
65	* 1'- 6"	1'- 10"	* 1'- 6"	1'- 10"	1'- 10"	* 1'- 10"
70	* 1'- 6"	1'- 9"	* 1'- 6"	1'- 9"	1'- 9"	* 1'- 9"

L/180 DEFLECTION CRITERIA GAUGE 0.040

SECTION PROPERTIES
NEUTRAL AXIS $Y_t = 0.062 \text{ in}$ $Y_b = 0.396 \text{ in}$
MOMENT OF INTERIA $I_x = 0.012 \text{ in}^4/\text{ft}$
SECTION MODULUS $S_t = 0.194 \text{ in}^3/\text{ft}$ $S_b = 0.032 \text{ in}^3/\text{ft}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 3'- 3"	* 4'- 5"	* 4'- 0"	* 3'- 3"	* 4'- 5"	* 4'- 0"
15	* 2'- 10"	* 3'- 10"	* 3'- 6"	* 2'- 10"	* 3'- 10"	* 3'- 6"
20	* 2'- 7"	* 3'- 6"	* 3'- 2"	* 2'- 7"	* 3'- 6"	* 3'- 2"
25	* 2'- 5"	* 3'- 3"	* 3'- 0"	* 2'- 5"	* 3'- 3"	* 3'- 0"
30	* 2'- 3"	* 3'- 0"	* 2'- 9"	* 2'- 3"	* 3'- 0"	* 2'- 9"
35	* 2'- 2"	* 2'- 10"	* 2'- 8"	* 2'- 2"	* 2'- 10"	* 2'- 8"
40	* 2'- 0"	* 2'- 9"	* 2'- 6"	* 2'- 0"	* 2'- 9"	* 2'- 6"
45	* 1'- 11"	* 2'- 8"	* 2'- 5"	* 1'- 11"	* 2'- 8"	* 2'- 5"
50	* 1'- 11"	2'- 6"	* 2'- 4"	* 1'- 11"	2'- 6"	* 2'- 4"
55	* 1'- 10"	2'- 5"	* 2'- 3"	* 1'- 10"	2'- 5"	* 2'- 3"
60	* 1'- 9"	2'- 3"	* 2'- 2"	* 1'- 9"	2'- 3"	* 2'- 2"
65	* 1'- 9"	2'- 2"	* 2'- 2"	* 1'- 9"	2'- 2"	* 2'- 2"
70	* 1'- 8"	2'- 1"	* 2'- 1"	* 1'- 8"	2'- 1"	* 2'- 1"

L/240 DEFLECTION CRITERIA GAUGE 0.032

SECTION PROPERTIES
NEUTRAL AXIS $Y_t = 0.056 \text{ in}$ $Y_b = 0.382 \text{ in}$
MOMENT OF INTERIA $I_x = 0.0083 \text{ in}^4/\text{ft}$
SECTION MODULUS $S_t = 0.149 \text{ in}^3/\text{ft}$ $S_b = 0.022 \text{ in}^3/\text{ft}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 7"	* 3'- 6"	* 3'- 3"	* 2'- 7"	* 3'- 6"	* 3'- 3"
15	* 2'- 3"	* 3'- 1"	* 2'- 10"	* 2'- 3"	* 3'- 1"	* 2'- 10"
20	* 2'- 1"	* 2'- 9"	* 2'- 7"	* 2'- 1"	* 2'- 9"	* 2'- 7"
25	* 1'- 11"	* 2'- 7"	* 2'- 4"	* 1'- 11"	* 2'- 7"	* 2'- 4"
30	* 1'- 10"	* 2'- 5"	* 2'- 3"	* 1'- 10"	* 2'- 5"	* 2'- 3"
35	* 1'- 8"	* 2'- 4"	* 2'- 2"	* 1'- 8"	* 2'- 4"	* 2'- 1"
40	* 1'- 8"	* 2'- 2"	* 2'- 0"	* 1'- 8"	* 2'- 2"	* 2'- 0"
45	* 1'- 7"	* 2'- 1"	* 1'- 11"	* 1'- 7"	* 2'- 1"	* 1'- 11"
50	* 1'- 6"	* 2'- 0"	* 1'- 11"	* 1'- 6"	* 2'- 0"	* 1'- 11"
55	* 1'- 6"	* 2'- 0"	* 1'- 10"	* 1'- 6"	* 2'- 0"	* 1'- 10"
60	* 1'- 5"	1'- 11"	* 1'- 9"	* 1'- 5"	1'- 11"	* 1'- 9"
65	* 1'- 5"	1'- 10"	* 1'- 9"	* 1'- 5"	1'- 10"	* 1'- 9"
70	* 1'- 4"	1'- 9"	* 1'- 8"	* 1'- 4"	1'- 9"	* 1'- 8"


L/240 DEFLECTION CRITERIA GAUGE 0.040

SECTION PROPERTIES
NEUTRAL AXIS $Y_t = 0.062 \text{ in}$ $Y_b = 0.396 \text{ in}$
MOMENT OF INTERIA $I_x = 0.012 \text{ in}^4/\text{ft}$
SECTION MODULUS $S_t = 0.194 \text{ in}^3/\text{ft}$ $S_b = 0.032 \text{ in}^3/\text{ft}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 11"	* 4'- 0"	* 3'- 8"	* 2'- 11"	* 4'- 0"	* 3'- 8"
15	* 2'- 7"	* 3'- 6"	* 3'- 2"	* 2'- 7"	* 3'- 6"	* 3'- 2"
20	* 2'- 4"	* 3'- 2"	* 2'- 11"	* 2'- 4"	* 3'- 2"	* 2'- 11"
25	* 2'- 2"	* 2'- 11"	* 2'- 8"	* 2'- 2"	* 2'- 11"	* 2'- 8"
30	* 2'- 0"	* 2'- 9"	* 2'- 6"	* 2'- 0"	* 2'- 9"	* 2'- 6"
35	* 1'- 11"	* 2'- 7"	* 2'- 5"	* 1'- 11"	* 2'- 7"	* 2'- 5"
40	* 1'- 10"	* 2'- 6"	* 2'- 4"	* 1'- 10"	* 2'- 6"	* 2'- 4"
45	* 1'- 9"	* 2'- 5"	* 2'- 3"	* 1'- 9"	* 2'- 5"	* 2'- 3"
50	* 1'- 9"	* 2'- 4"	* 2'- 1"	* 1'- 9"	* 2'- 4"	* 2'- 1"
55	* 1'- 8"	* 2'- 3"	* 2'- 1"	* 1'- 8"	* 2'- 3"	* 2'- 1"
60	* 1'- 7"	* 2'- 2"	* 2'- 0"	* 1'- 7"	* 2'- 2"	* 2'- 0"
65	* 1'- 7"	* 2'- 1"	* 1'- 11"	* 1'- 7"	* 2'- 1"	* 1'- 11"
70	* 1'- 6"	* 2'- 1"	* 1'- 11"	* 1'- 6"	* 2'- 1"	* 1'- 11"

Notes:


1. * Indicates maximum span controlled by deflection.
2. All loads are perpendicular to surface of panel.
3. No increase for wind loading has been assumed.
4. Since allowable loads and spans can be affected by actual conditions of use, information in these tables is intended for use only by those qualified to assess these effects.
5. Load tables are based upon section property analysis. Other factors such as fastener adequacy may apply to allowable span conditions per project.



LOAD TABLES
STEEL
ASTM A653
SS 33

6" COVERAGE

OPALINE PANEL OPF060

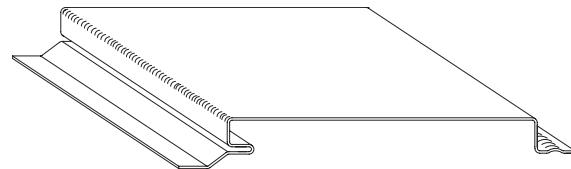

L/180 DEFLECTION CRITERIA

24 GAUGE FY= 33 KSI

SECTION PROPERTIES

NEUTRAL AXIS Yt= 0.110 in Yb= 0.327 in

MOMENT OF INTERIA Ix= 0.006023 in⁴/ft

SECTION MODULUS St= 0.055 in³/ft Sb= 0.018 in³/ft

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 3'- 8"	4'- 10"	* 4'- 7"	4'- 10"	4'- 10"	5'- 5"
15	* 3'- 3"	3'- 11"	* 4'- 0"	3'- 11"	4'- 5"	
20	* 2'- 11"	3'- 5"	* 3'- 8"	3'- 5"	3'- 10"	
25	* 2'- 9"	3'- 0"	* 3'- 4"	3'- 0"	3'- 5"	
30	* 2'- 7"	2'- 9"	3'- 1"	2'- 9"	2'- 9"	3'- 1"
35	* 2'- 5"	2'- 7"	2'- 10"	2'- 7"	2'- 10"	
40	* 2'- 4"	2'- 5"	2'- 8"	2'- 5"	2'- 8"	
45	* 2'- 3"	2'- 3"	2'- 6"	2'- 3"	2'- 6"	
50	2'- 2"	2'- 2"	2'- 5"	2'- 2"	2'- 5"	
55	2'- 0"	2'- 0"	2'- 3"	2'- 0"	2'- 3"	
60	1'- 11"	1'- 11"	2'- 2"	1'- 11"	2'- 2"	
65	1'- 10"	1'- 10"	2'- 1"	1'- 10"	2'- 1"	
70	1'- 10"	1'- 10"	2'- 0"	1'- 10"	2'- 0"	

L/240 DEFLECTION CRITERIA

24 GAUGE FY= 33 KSI

SECTION PROPERTIES

NEUTRAL AXIS Yt= 0.110 in Yb= 0.327 in

MOMENT OF INTERIA Ix= 0.006023 in⁴/ft

SECTION MODULUS St= 0.055 in³/ft Sb= 0.018 in³/ft

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 3'- 4"	* 4'- 6"	* 4'- 2"	4'- 10"	4'- 10"	5'- 5"
15	* 2'- 11"	3'- 11"	* 3'- 8"	3'- 11"	3'- 5"	
20	* 2'- 8"	3'- 5"	* 3'- 4"	3'- 5"	3'- 10"	
25	* 2'- 6"	3'- 0"	* 3'- 1"	3'- 0"	3'- 0"	
30	* 2'- 4"	2'- 9"	* 2'- 11"	2'- 9"	2'- 9"	3'- 1"
35	* 2'- 2"	2'- 7"	* 2'- 9"	2'- 7"	2'- 7"	2'- 10"
40	* 2'- 1"	2'- 5"	* 2'- 7"	2'- 5"	2'- 5"	2'- 8"
45	* 2'- 0"	2'- 3"	* 2'- 6"	2'- 3"	2'- 3"	2'- 6"
50	1'- 11"	2'- 2"	2'- 5"	2'- 2"	2'- 2"	2'- 5"
55	1'- 11"	2'- 0"	2'- 3"	2'- 0"	2'- 0"	2'- 3"
60	1'- 10"	1'- 11"	2'- 2"	1'- 11"	1'- 11"	2'- 2"
65	1'- 9"	1'- 10"	2'- 1"	1'- 10"	2'- 1"	1'- 10"
70	1'- 9"	1'- 10"	2'- 0"	1'- 10"	1'- 10"	2'- 0"

Notes:

1. * Indicates maximum span controlled by deflection.
2. All loads are applied perpendicular to surface of panel.
3. No increase for wind loading has been assumed.
4. Since allowable loads and spans can be affected by actual conditions of use, information in these tables is intended for use only by those qualified to assess these effects.
5. Load tables are based upon section property analysis. Other factors such as fastener adequacy may apply to allowable span conditions per project.