


3/8" UNIFORM BEAD OF NON-SKINNING BUTYL SEALANT MUST BE APPLIED IN THE INTERIOR FEMALE GROOVE. APPLYING SEALANT IN THE EXTERIOR FEMALE GROOVE IS OPTIONAL, DEPENDING ON VAPOR SEAL REQUIREMENTS

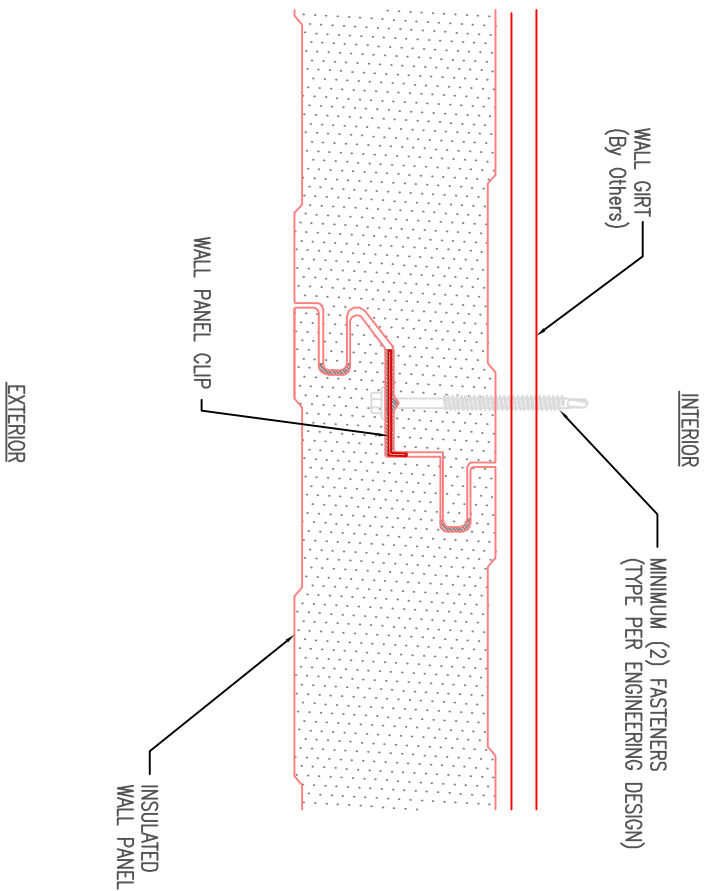

REV. NO.	DATE	DESCRIPTION OF REVISION	BY	APP

ATAS
ATAS INTERNATIONAL, INC
 Allentown PA
 610-395-8445
 Mesa AZ
 480-558-7210

TITLE: Vertical Wall-Sheet Metal Flashing-Side Lap

DWG. NO.	DR.	DATE
MATERIAL	APP	DATE
SH. SIZE	SCALE	X: X

** THE DETAIL SHOWN IS SUBJECT TO CHANGE WITHOUT NOTICE.