
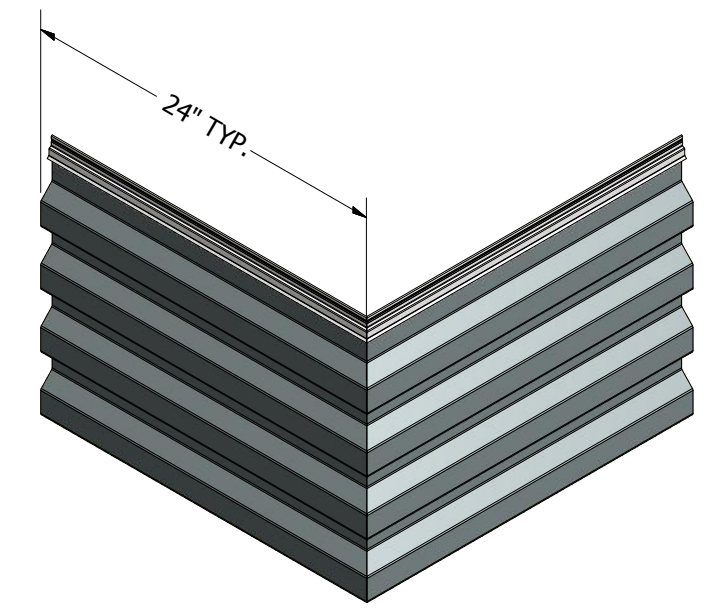


- Wall Panel
- Painted Pop Rivets (2 per splice) attach pop rivets on one side only to allow for thermal movement of panels.
- Splice
- Butyl Sealant (both sides of splice)
- Interior Finish
- Insulation
- Appropriate Fastener
- 1/2" Plywood (min.)
- Appropriate Underlayment
- Mitered Corner

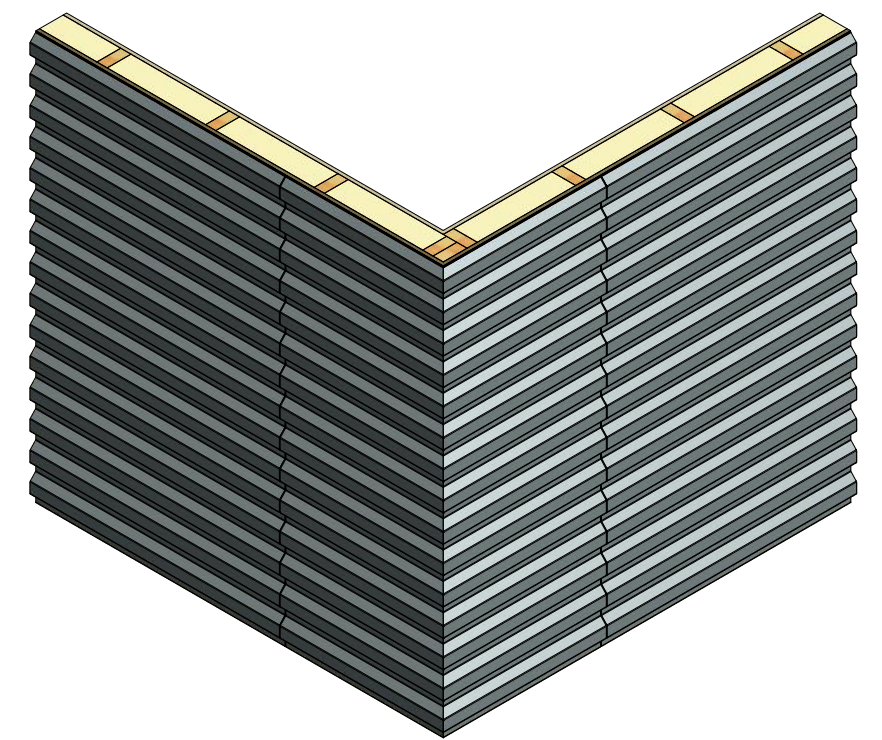

**Mitered Corner N.T.S.
(Inside Mitered Corner Available)**


ATAS INTERNATIONAL, INC
 Allentown PA
 610-395-8445
 Mesa AZ
 480-558-7210

REV. NO.		DATE		DESCRIPTION OF REVISION		BY	APP	TITLE	
								Elite Mitered Corner Detail	
DWG. NO.		DR		DATE		APP		DATE	
		KRK		10/31/2014					
MATERIAL		SH. SIZE		SCALE		BY		APP	
		B		X:X					