



CONDITION AT PERIMETER OF WALL

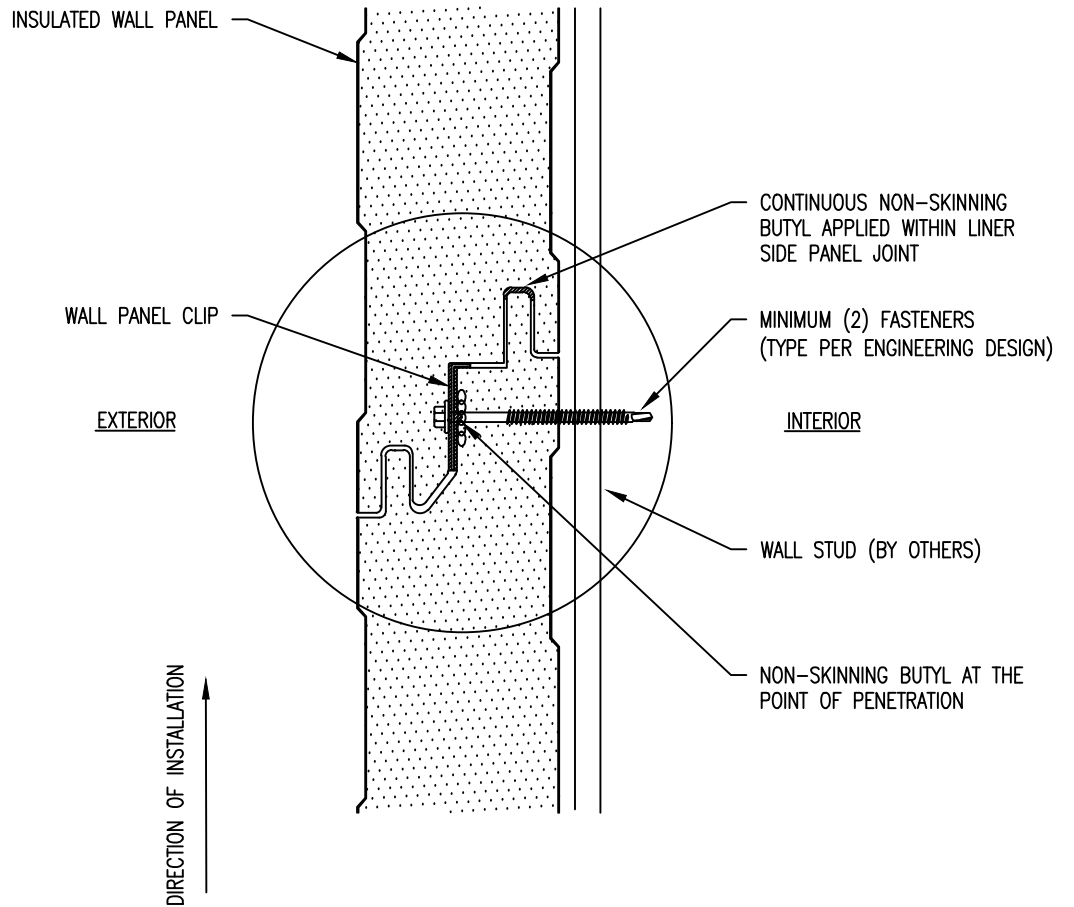

3/8" UNIFORM BEAD OF NON-SKINNING BUTYL SEALANT MUST BE APPLIED IN THE INTERIOR FEMALE GROOVE. APPLYING SEALANT IN THE EXTERIOR FEMALE GROOVE IS OPTIONAL DEPENDING ON VAPOR SEAL REQUIREMENTS

\*\* THE DETAIL SHOWN IS SUBJECT TO CHANGE WITHOUT NOTICE



ATAS INTERNATIONAL, INC  
 Allentown PA  
 610-395-8445  
 Mesa AZ  
 480-558-7210

					TITLE	
					Horizontal Wall-Sheet Metal Flashing-Side Lap	
DWG. NO.			DR		DATE	
			APP		DATE	
MATERIAL			SH. SIZE		SCALE	
					X:X	
REV. NO.	DATE	DESCRIPTION OF REVISION	BY	APP		