

CURVED FIELD-LOK™

SKU: FLX (convex, min. radius 8'-0" aluminum, 12'-0" steel)

MATERIAL

.032 aluminum
24, 22* ga. metallic coated steel
24 ga. 55% Al-Zn alloy coated steel with acrylic coating
16, 20 oz. copper*

PANEL SPECS

Coverage: 1" seam - 13 1/2", 17 1/2", 21 3/4"
1 1/2" seam - 12 1/2", 16 1/2", 20 3/4" | Custom widths available
Minimum Length: 4'-0"
Seam Height: 1", 1 1/2"



TEXTURE

Smooth

MINIMUM SLOPE

2:12 depending on climate conditions

www.atas.com/curvedfieldlok

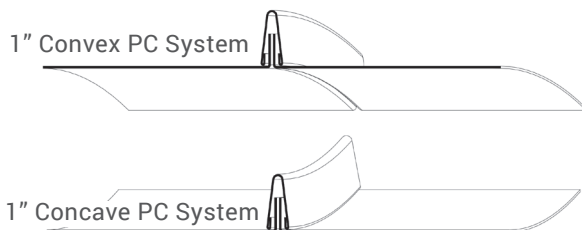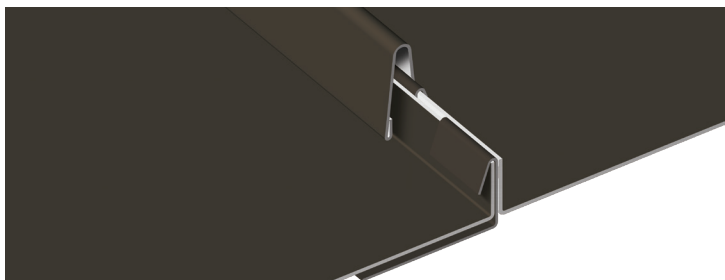

CURVED PC™ SYSTEM

SKU: PCX (convex, minimum radius 2'-9"),
PCV (concave, minimum radius 4'-0")

MATERIAL

.032, .040 aluminum
24 ga. metallic coated steel
24 ga. 55% Al-Zn alloy coated steel with acrylic coating
16 oz. copper*

PANEL SPECS

Coverage: 11 1/4", 12 5/8", 14 5/8"**, 15 1/4"
**Copper and Dark Bronze Anodized only
Minimum Length: 3'-0"
Seam Height: 1"

AVAILABLE

Tapered, Dome

TEXTURE

Smooth or Stucco Embossed

MINIMUM SLOPE

3:12

www.atas.com/curvedpc