

2 3/8" FIELD-LOK™

SKU: FLS137, FLS180

MATERIAL

.032, .040 aluminum,
24, 22* ga. metallic coated steel,
24 ga. 55% Al-Zn alloy coated steel with acrylic coating

PANEL SPECS

Coverage: 13 3/4", 18"
(Stiffening ribs standard, specify without ribs or striations)
Minimum Length: 4'-0"
Seam Height: 2 3/8"

AVAILABLE

Factory panel pre-notching available.
Contact ATAS for specifics.


TEXTURE

Smooth or Stucco Embossed (available in 24 ga. steel & .032 & .040 aluminum)



MINIMUM SLOPE

1/2:12

 www.atas.com/fls



FLS Series standing seam panel
features a Triple-Lok design

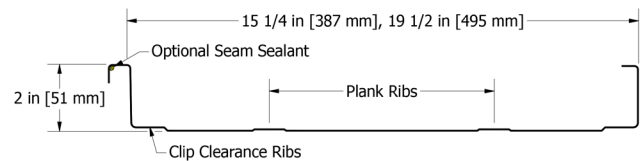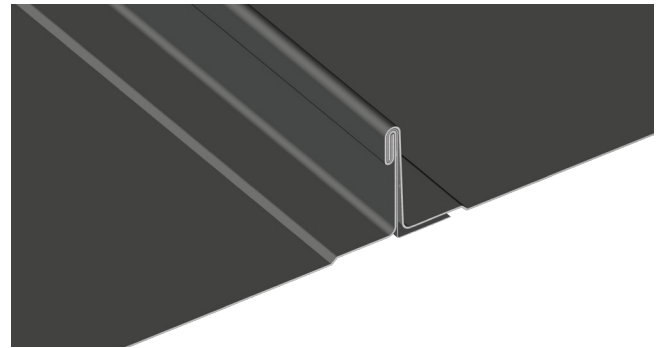

2" FIELD-LOK™

SKU: FLR154, FLR195, FLR999

MATERIAL

.032, .040 aluminum
24, 22* ga. metallic coated steel
24 ga. 55% Al-Zn alloy coated steel with acrylic coating
16, 20 oz. copper*[^]
.7 mm zinc*[^]
.0197 classic & tin matte stainless steel*[^]
[^]Inquire for available panel widths

PANEL SPECS

Coverage: 15 1/4", 19 1/2"
Custom widths available (Plank ribs standard, specify without ribs or striations)
Minimum Length: 4'-0"
Seam Height: 2"

AVAILABLE

Tapered
Factory panel pre-notching available.
Contact ATAS for specifics.



TEXTURE

Smooth or Stucco Embossed (available in 24 ga. steel & .032 aluminum)

MINIMUM SLOPE

1/2:12

 www.atas.com/flr

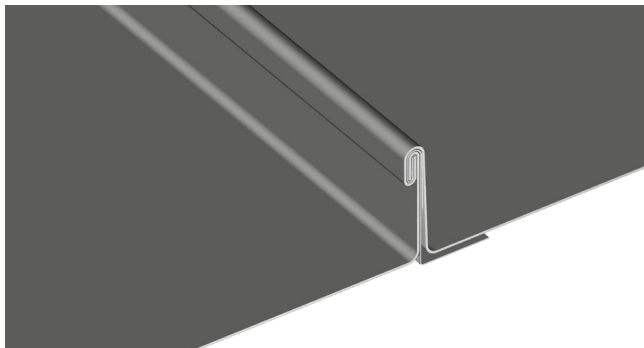

1 1/2" FIELD-LOK™

SKU: FLM125, FLM165, FLM207, FLM999

MATERIAL

.032, .040 aluminum

24, 22* ga. metallic coated steel

24 ga. 55% Al-Zn alloy coated steel with acrylic coating

16, 20 oz. copper*^

.7 mm zinc*^

.0197 classic & tin matte stainless steel*^

^Inquire for available panel widths

PANEL SPECS

Coverage: 12 1/2", 16 1/2", 20 3/4"

Custom widths available* (Plank ribs standard, specify without ribs or striations)

Minimum Length: 4'-0"

Seam Height: 1 1/2"

AVAILABLE

Tapered, Stretch Curved (Convex)

Factory panel pre-notching available.

Contact ATAS for specifics.



TEXTURE

Smooth or Stucco Embossed (available in 24 ga. steel & .032 aluminum)

MINIMUM SLOPE

2:12 depending on climate conditions

 www.atas.com/flm

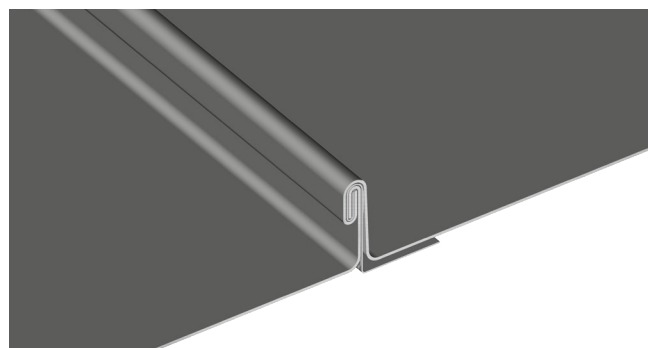

1" FIELD-LOK™

SKU: FLL135, FLL175, FLL217, FLL999

MATERIAL

.032, .040 aluminum

24, 22* ga. metallic coated steel

24 ga. 55% Al-Zn alloy coated steel with acrylic coating

16, 20 oz. copper*^

.7 mm zinc*^

.0197 classic & tin matte stainless steel*^

^Inquire for available panel widths

PANEL SPECS

Coverage: 13 1/2", 17 1/2", 21 3/4"

Custom widths available* (Plank ribs standard, specify without ribs or striations)

Minimum Length: 4'-0"

Seam Height: 1"

AVAILABLE

Tapered, Stretch Curved (Convex)

Factory panel pre-notching available.

Contact ATAS for specifics.

TEXTURE

Smooth or Stucco Embossed (available in 24 ga. steel & .032 aluminum)

MINIMUM SLOPE

2:12 depending on climate conditions

 www.atas.com/fll

2 3/8" FIELD-LOK
Charcoal Grey
Nitschmann Middle School



2" FIELD-LOK
Dove Grey
U.S. Coast Guard



