

RIGID WALL™

SKU: MFR160

MATERIAL

.032, .040, .050 aluminum 24, 22*, 20*, 18* ga. metallic coated steel 24, 22*, 20*, 18* ga. 55% Al-Zn alloy coated steel with acrylic coating 1.0 mm zinc*

PANEL SPECS

Coverage: 16"


Minimum Length: 6'-0"

Depth: %"

TEXTURE

Smooth or Stucco Embossed

www.atas.com/rigidwall

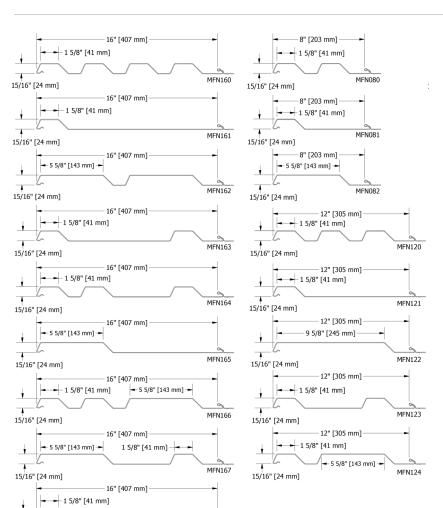

MFN168

MFN169

9 5/8" [245 mm]

16" [407 mm]

9 5/8" [245 mm]

15/16" [24 mm]

15/16" [24 mm]

RIGID WALL II™

SKU: MFN

MATERIAL

.032, .040, .050 aluminum 24, 22*, 20*, 18* ga. metallic coated steel 24, 22*, 20*, 18* ga. 55% Al-Zn alloy coated steel with acrylic coating 1.0 mm zinc*

PANEL SPECS

Coverage: 8", 12", 16" Minimum Length: 2'-8"

Depth: 15/16"

AVAILABLE

Factory panel pre-notching available. Contact ATAS for specifics.

TEXTURE

Smooth or Stucco Embossed

www.atas.com/rigidwall2

