

ATAS International, Inc. Sustainable Building Envelope Technology

RAPID-LOK EXTRUDED FASCIA

SPECIFICATION SHEET

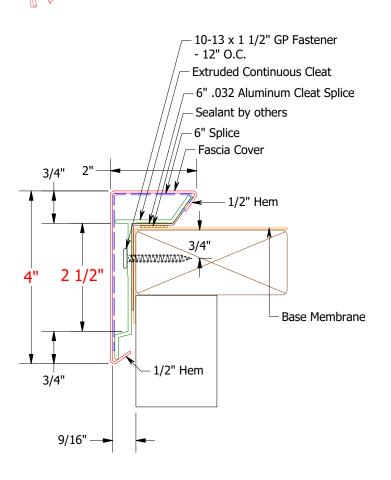

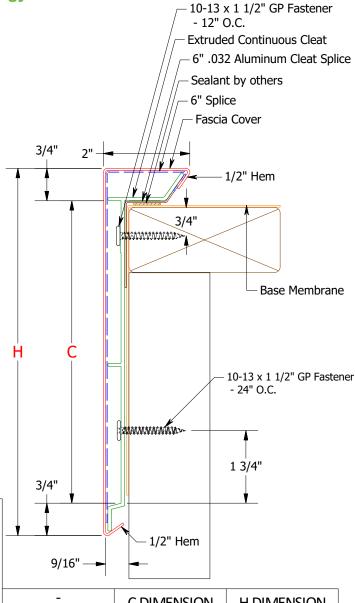

-	C DIMENSION	H DIMENSION
	2-1/2" 4" 5-1/2"	4" 5-1/2" 7"
- - -	7" 8-1/2" 10"	8-1/2" 10" 11-1/2"
ANGLICADE EC. 4 Table 4		

ANSI/SPRI ES-1 Tested

Projects Requirement's Horizontal Design Pressure:_____psf

Job Name:	Customer:	
Job #:	Representative:	
Location:	Distributor:	
CUSTOMER APPROVAL		
Authorized Signature:		
Approved by:		
Data		

Quantity:

Radius Fascia LF (6'-0" pcs) (Radius: , Convex or Concave) Vaulted Fascia LF (6'-0" pcs) (Radius: , Convex or Concave)

Standard Accessories:

Total LF (12'-0" pcs)

Inside Mitered Corner(s) (Angle:) Outside Mitered Corner(s) (Angle:____) _End Closure(s) (____ Left, ____ Right) _End Term(s) (____ Left, ___ Right) _Sump(s) (Downspout Size: ____) _Spillout(s)

Custom Accessories: (sketches required)

Special Miters and Zees

*All Componets for installing Accessories are included.

MATERIAL: THICKNESS: ☐ Pre-Finished Aluminum □ .040

□ .050 □.063 ☐ Mill Finished Aluminum .040 .050 \Box .063 ☐ 24 ga ☐ 22 ga ☐ Pre-Finished Steel

☐ 24 ga ☐ 22 ga

COLOR:

☐ Stainless Steel