


Standing Seam

1" Batten


2" Batten




1" Standing Seam



1" Batten Seam

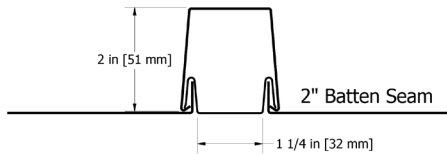

2" Batten Seam

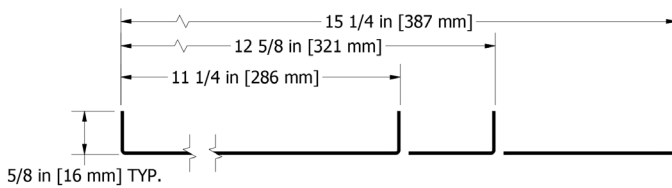

PC™ SYSTEM

SKU: Panel: PCP110, PCP120, PCP150, PCP999

Seam: PCS114

Batten: PCB001, PCB002

Copper: PCP147

MATERIAL

.032, .040 aluminum

24, 22* ga. metallic coated steel

24 ga. 55% Al-Zn alloy coated steel with acrylic coating

16 oz. copper* (PCP147 only)

PANEL SPECS

Coverage: 11 1/4", 12 5/8", 14 5/8"**, 15 1/4"

Custom widths available*

**Copper and Dark Bronze Anodized only

Minimum Length: 2'-0" for straight, 3'-0" for curved

Standing Seam: 1"

Batten Seam: 1" x 1 1/2" or 2" x 1 1/2"

AVAILABLE

Straight, Tapered, Stretch Curved* (Convex and Concave)

*Available in standing seam only



TEXTURE

Smooth or Stucco Embossed

MINIMUM SLOPE

3:12

www.atas.com/pc

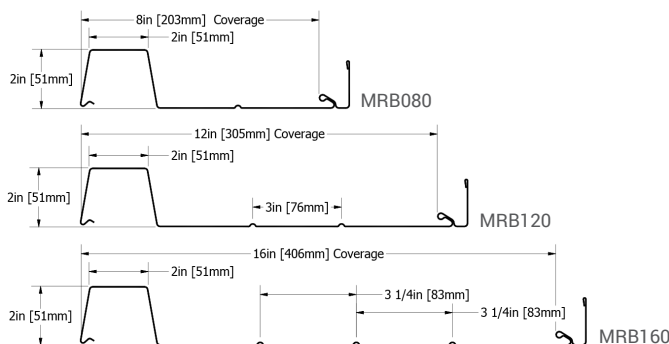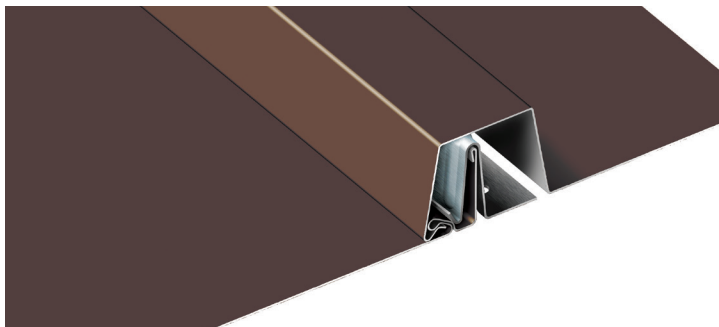

MONARCH™ BATTEN SEAM

SKU: MRB080, MRB120, MRB160

MATERIAL

.032, .040, .050* aluminum

24, 22* ga. metallic coated steel

24 ga. 55% Al-Zn alloy coated steel with acrylic coating*

16, 20 oz. copper*

PANEL SPECS

Coverage: 8", 12", 16"

(stiffening ribs standard, specify without)

Minimum Length: 4'-0"

Seam Height: 2"

TEXTURE

Smooth or Stucco Embossed

MINIMUM SLOPE

2:12

www.atas.com/monarch