

1. PRODUCT NAME

**CORRA-LOK™
MFC160**

2. MANUFACTURER

ATAS INTERNATIONAL, INC.
Website: www.atas.com
Email: info@atas.com
Corporate Headquarters:
Allentown, PA 18106
Phone: (800) 468-1441

3. PRODUCT DESCRIPTION

Basic Uses:

Corra-Lok is a 16 $\frac{5}{8}$ " wide by $\frac{7}{8}$ " deep structural panel that provides dramatic shadow lines with its 2 $\frac{3}{4}$ " wide corrugations. Typical applications include walls, equipment screens, mansards and roofing. The system utilizes concealed fasteners to offer uninterrupted vertical or horizontal sight lines.

Composition & Materials:

Standard Offerings: Corra-Lok panels are roll-formed from .032, .040, and .050 aluminum; 22 and 24 gauge metallic coated steel; and 24 gauge 55% Al-Zn alloy coated steel with acrylic coating.

Special Offerings: 22 gauge 55% Al-Zn alloy coated steel with acrylic coating; 16, 20 oz. copper; 1.0 mm zinc; and .0197 classic & tin matte stainless steel may be specified, subject to minimum quantities and lead time.

Sizes:

Corra-Lok panels have a 16 $\frac{5}{8}$ " wide nominal coverage. Panel lengths are cut to customer specifications, with a minimum of 6' and a maximum to transportation limitations and/or product and project design considerations.

Colors & Finishes:

A choice of over 40 stock colors is available in a 70% PVDF finish. (Request color chart or chips). Custom colors available. An anodized finish is available in Clear Satin or Dark Bronze. Texture is smooth or stucco embossed. Perforations are available.

4. TECHNICAL DATA

70% PVDF based finishes tested by paint supplier for:

- Dry Film Thickness: ASTM D 1005, ASTM D 1400, ASTM D 4138 or ASTM D 5796
- Specular Gloss: ASTM D 523
- Pencil Hardness: ASTM D 3363
- T-Bend Flexibility: ASTM D 4145
- Mandrel Bend Flexibility: ASTM D 522
- Impact Resistance: ASTM D 2794

- Adhesion: ASTM D 3359
- Water Immersion Resistance: ASTM D 870
- Abrasion Resistance: ASTM D 968
- Acid Resistance: ASTM D 1308
- Acid Rain Resistance (Kesternich): ASTM G 87 or DIN 50018
- Salt Spray: ASTM B 117
- Cyclic Salt Spray: ASTM D 5894 and ASTM D 5487
- Humidity Resistance: ASTM D 2247
- Accelerated Weathering: ASTM D 822 and ASTM G 155, ASTM G 151 or ASTM G 153
- Color Retention, Florida Exposure: ASTM D 2244
- Chalking Resistance: ASTM D 4214
- Cleveland Condensing Cabinet: ASTM D 4585
- Cure Test, MEK Resistance: ASTM D 5402
- Alkali Resistance, Sodium Hydroxide: ASTM D 1308, Procedure 7.2
- Flame Spread Rating: ASTM E 84
- Organic coatings meet requirements of AAMA 2605 when applied to aluminum.

Panel testing/ratings:

- Galvanized Steel: ASTM A 653
- 55% Al-Zn alloy Coated Steel: ASTM A 792
- Aluminum: ASTM B 209
- Copper: ASTM B 370
- Coil Coating: ASTM A 755
- Load Tables available upon request.



5. INSTALLATION

Corra-Lok panels have a positive panel-to-panel interlock. Recommended minimum slope is 4:12. Installation details and hands-on training via seminars are available through ATAS. Visit www.atas.com for more information.

6. AVAILABILITY & COST

Availability:

Corra-Lok panels are available through ATAS product distributors. A complete line of related components and trim accessories is available to

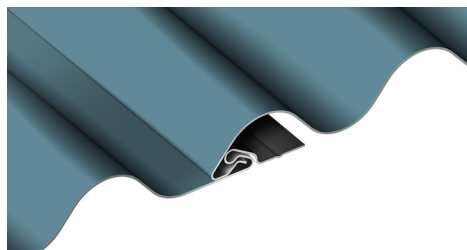

complete the wall system. In addition, a complete line of rainware and perimeter roof edge trims can be supplied by ATAS to complement the wall system. Flat sheet and/or coil stock is available in matching color for fabrication of related components by the installing contractor.

Cost:

Contact ATAS product distributors for current pricing.

7. WARRANTY

Products coated with a fluoropolymer, 70% PVDF finish carry a limited warranty against chalking and fading.

8. MAINTENANCE

Corra-Lok panels require minimal maintenance. Surface residue may be easily removed by conventional cleaning methods. For painted products, minor scratches should be touched up with a matching paint, available from the manufacturer.

9. TECHNICAL SERVICES

Complete technical information and literature are available at www.atas.com. ATAS will assist with design ideas and shop drawings.

10. FILING SYSTEM

- www.atas.com
- Additional product information is available from the manufacturer upon request.

